

CENTRIFUGES PROJECT

NEYA

by **X5**

*PASSION
changes
everything*



GIORGIO·BORMAC
s.r.l.

Derived from the Hindi word "NAYA", that means "new", "novelty", "innovation", "NEYA" is the name given to the new generation of centrifuges developed in synergy by REMI and GIORGIO BORMAC.

The big experience of a historical manufacturer as REMI, combined to the Italian style and design of GIORGIO BORMAC, make a perfect combination in developing products with performance and characteristics suitable to all the operational requests.

It is with these premises that we are pleased to present the new project "NEYA"!

NEYA...a new concept... a new project... a new generation!

PASSION
changes
everything



2006



2011



2013



2016

NEW ROTORS AND ACCESSORIES

FIRST LETTER

- A**= Fixed angle rotor
- S**= Swing out rotor
- B**= Bucket
- SB**= Swing out rotor + Buckets (KIT)
- L**= Lid of bucket
- I**= Insert for bucket
- C**= Cushion
- RE**= Reductor
- T**= Tube
- PCR**= PCR rotor
- HE**= Hematocrit rotor

MIDDLE NUMBERS*

- 1° NUMBER**= maximum number of tubes
- 2° NUMBER**= capacity of tubes (ml)

LAST LETTER

- F**= Falcon® tube included or suitable for conical bottom tube
- P**= Plastic round bottom tube included
- G**= Glass round bottom tube included
- R**= Suitable for round bottom tube
- X**= Extra metal bucket (long version)

* Only for reductors (RE), the middle numbers identify the capacity reduction (ml)
In case of only one middle number, it represents the capacity (ml)
For PCR and hematocrit rotors, the middle numbers represent
respectively number of PCR strips, number of capillaries and their length (mm)

A 32-15 N

Fixed angle rotor for 32 tubes 15 ml

S 4-175

Swing out rotor for 4 buckets 175 ml

B 16-5/7

Aluminum carrier for 16 tubes 5/7 ml

SB 4-175

*Kit composed by swing out rotor S 4-175
and 4 buckets B 175 of 175 ml*

I 4-15R

Insert for 4 round bottom tubes 15 ml

RE 50-15F

Reductor from 50 ml to 15 ml conical bottom

B 50XF

*Metal bucket 50 ml extra version
with 50 ml Falcon® tube included*

NEYA 8

MAX CAPACITY



4 X 175 ml

MAX SPEED



6.000 rpm




- Automatic rotor detection,
- Check of presence of accessories and rotor compatibility with maximum speed
- Safety speed limiter function
- Controlled by microprocessor
- Backlit color LCD display with contemporary visualization of all parameters
- Digital adjustment of acceleration and deceleration levels
- Compact sizes to optimize the space in laboratory
- Stainless steel internal bowl with optimal height for load and download of samples
- Imbalance detection system with automatic stop function
- Automatic locking system of the lid
- Safety opening of the lid in case of absence of electric power
- Brushless motor maintenance free and no deposits
- Construction in accordance with European directives

working cycle



Alarm signal

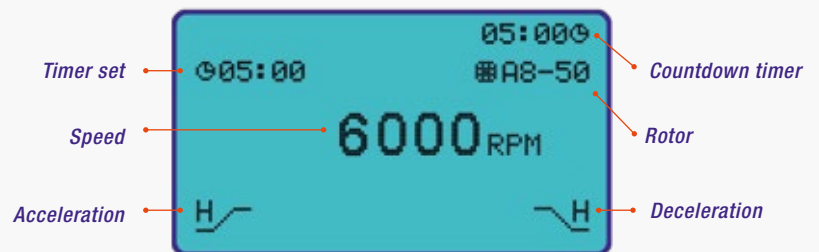

FEATURES

NEYA 8

Maximum capacity	4 x 175 ml (swing out) - 6 x 100 ml (fixed angle)
Maximum speed	4.500 rpm (swing out) - 6.000 rpm (fixed angle)
Setting RPM	Yes
Setting RCF	-
Display RCF	-
Timer	00:30 ÷ 99:50 (mm:ss) and continuous mode
Date and Time	-
Acceleration levels	L-M-H (Low - Medium - High)
Deceleration levels	L-M-H (Low - Medium - High)
Spin function	-
Programs	-
Indication of rotor	Yes
Noise	55 dB
Directive / Standard	IEC 1010-1 ; IEC 1010-2-020
External dimensions WxDxH/Weight	450 x 590 x 330 mm / 40 Kg
Height of access to the chamber	275 mm
Voltage / Power	220 ±10% V 50Hz / 450 W

Part number

40100302



Low speed rotor for all NEYA models



Optimal height for load and download of samples

NEYA 10^R

MAX CAPACITY



4 X 175 ml

MAX SPEED



6.000 rpm



10 prog.




refrigerated



Refrigerated centrifuge NEYA 10 R

- Automatic rotor detection,
- Check of presence of accessories and compatibility with maximum speed
- Backlit color LCD display with contemporary visualization of all parameters
- Stainless steel internal bowl with optimal height for load and download of samples
- Safety speed limiter function
- 10 storable programs with protection function
- Setting of speed in RPM and RCF
- Short Spin function and precool (NEYA 10R)
- Temperature range from -10°C to +40°C (NEYA 10R)
- Controlled by microprocessor
- Digital adjustment of acceleration and deceleration levels
- Imbalance detection system with automatic stop function
- Automatic locking system of the lid,
- Safety opening of the lid in case of absence of electric power
- Brushless motor maintenance free and no deposits

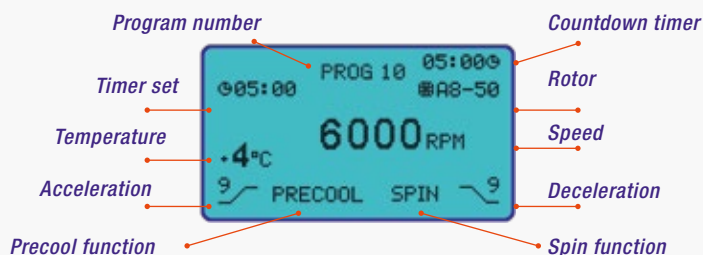

FEATURES

NEYA 10

NEYA 10R

Maximum capacity	4 x 175 ml (swing out) - 6 x 100 ml (fixed angle)	
Maximum speed	4.500 rpm (swing out) - 6.000 rpm (fixed angle)	
Setting RPM		Yes
Setting RCF		Yes
Display RCF		Yes
Timer	00:30 ÷ 99:50 (mm:ss) and continuous mode	
Date and Time		Yes
Acceleration levels	0÷9 (0 = min - 9 = max)	
Deceleration levels	0÷9 (0 = min - 9 = max)	
Temperature range	-	-10 ÷ +40°C / +14 ÷ +114°F
Precool function	-	Yes
Display temperature	-	Yes (°C and °F)
Spin function		Yes
Programs	10 programs with protection function	
Indication of rotor		Yes
Noise	55 dB	55 dB
Directive / Standard	IEC 1010-1 ; IEC 1010-2-020	
External dimensions WxDxH/Weight	450 x 590 x 330 mm / 40 Kg	730 x 640 x 330 mm / 70 Kg
Height of access to the chamber	275 mm	
Voltage / Power	220 ±10% V 50 Hz / 450 W	220 ±10% V 50 Hz / 750 W
Part number	40100312	40100332



Ventilated centrifuge NEYA 10



Visual signal of end of centrifugation

NEYA 16^R

MAX CAPACITY



4 X 175 ml

MAX SPEED



16.000 rpm



10 prog.




refrigerated



- Automatic rotor detection,
- Check of presence of accessories and compatibility with maximum speed
- Backlit color LCD display with contemporary visualization of all parameters
- Stainless steel internal bowl with optimal height for load and download of samples
- Safety speed limiter function
- 10 storable programs with protection function
- Setting of speed in RPM and RCF
- Short Spin function and precool (NEYA 16R)
- Temperature range from -10°C to +40°C (NEYA 16R)
- Controlled by microprocessor
- Digital adjustment of acceleration and deceleration levels
- Imbalance detection system with automatic stop function
- Automatic locking system of the lid,
- Safety opening of the lid in case of absence of electric power
- Brushless motor maintenance free and no deposits

Refrigerated centrifuge NEYA 16 R



Standby



Centrifugation cycle



Program protection



Alarm signal

FEATURES

FEATURES	NEYA 16	NEYA 16R
Maximum capacity	4 x 175 ml (swing out) - 6 x 100 ml (fixed angle)	
Maximum speed	4.500 rpm (swing out) - 16.000 rpm (fixed angle)	
Setting RPM		Yes
Setting RCF		Yes
Display RCF		Yes
Timer	00:30 ÷ 99:50 (mm:ss) and continuous mode	
Date and Time	Yes	
Acceleration levels	0÷9 (0 = min - 9 = max)	
Deceleration levels	0÷9 (0 = min - 9 = max)	
Temperature range	-	-10 ÷ +40°C / +14 ÷ +114°F
Precool function	-	Yes
Display temperature	-	Yes (°C and °F)
Spin function		Yes
Programs	10 programs with protection function	
Indication of rotor		Yes
Noise	55 dB	55 dB
Directive / Standard	IEC 1010-1 ; IEC 1010-2-020	
External dimensions WxDxH/Weight	450 x 590 x 330 mm / 40 Kg	730 x 640 x 330 mm / 70 Kg
Height of access to the chamber	275 mm	
Voltage / Power	220 ±10% V 50 Hz / 450 W	220 ±10% V 50 Hz / 750 W
Part number	40100322	40100342



Ventilated centrifuge NEYA 16



High speed rotor for NEYA 16 and 16R

SWING OUT ROTORS

3

I 7-10



Set of 4 pieces
P/N 40100622

For collection tubes
Vacutainer®

Max tubes for
insert 7

Max tubes
for rotor 28



Capacity 10 ml
Ø max. 16 mm
H max. 114 mm

2

I 7-5/7



Set of 4 pieces
P/N 40100612

For collection tubes
Vacutainer®

Max tubes for
insert 7

Max tubes
for rotor 28



Capacity 5-7 ml
Ø max. 13 mm
H max. 116 mm

1

I 12-2



Set of 4 pieces
P/N 40100602

For microtubes
Eppendorf®

Max tubes for
insert 12

Max tubes
for rotor 48



Capacity 1,5-2 ml
Ø max. 10,6 mm
H max. 42 mm

4

I 4-15F



Set of 4 pieces
P/N 40100632

For conical bottom
tubes as Falcon®

Max tubes for
insert 4

Max tubes
for rotor 16



Capacity 15 ml
Ø max. 16,5 mm
H max. 120 mm



SB 4-175

Kit composed by swing out rotor
S 4-175, 4 buckets **B 175** and 4 Biosafe
lids **L 175**

Maximum capacity	4x175 ml
Maximum speed	4.500 rpm
Maximum acceleration	3.600 xg
Part number	40100502



S 6-96 MP

Swing out rotor
for microplates

Max plates for tray 3
Max plates for rotor 6

Max speed: 3.200 rpm
Max acceleration: 1.950 xg

Part number: 40100522

Supplied complete
with 2 trays

S 4-175

Swing out rotor
for aluminum carriers

Max speed: 4.500 rpm
Max acceleration: 3.600 xg

Codice: 40101502



5

I 4-15R

Set of 4 pieces
P/N 40100642

For round bottom tubes

Max tubes for insert 4

Max tubes for rotor 16



Capacity 15 ml
Ø max. 17 mm
H max. 110 mm

6

I 1-50 SF

Set of 4 pieces
P/N 40100682

For conical bottom tubes as Falcon®

Max tubes for insert 1

Max tubes for rotor 4



Capacity 50 ml
Ø max. 29 mm
H max. 116 mm

7

I 1-50 R

Set of 4 pieces
P/N 40100662

For round bottom tubes

Max tubes for insert 1

Max tubes for rotor 4



Capacity 50 ml
Ø max. 30 mm
H max. 110 mm

8

I 1-100

Set of 4 pieces
P/N 40100672

For round bottom tubes

Max tubes for insert 1

Max tubes for rotor 4



Capacity 100 ml
Ø max. 45,5 mm
H max. 102 mm

Direct insertion of bottles

It is possible insert flat bottom plastic bottles with 175 ml capacity without reducers



T 175 Flat bottom plastic bottle 175 ml with lid
Part number 40003492

Aluminum carriers for swing out rotor S 4-175

	B 2-50F	B 2-50R	B 7-15F	B 7-15R	B 12-10	B 14-5/7	B 16-5/7
For tube	50 ml conical	50 ml round	15 ml conical	15 ml round	10 ml	5/7 ml	5/7 ml
Max tubes for carrier	2	2	7	7	12	14	16
Max tubes for rotor	8	8	28	28	48	56	64
Part number	40101532	40101582	40101542	40101592	40101552	40101562	40101572

FIXED ANGLE ROTORS

For high capacity

All the rotors are supplied without metal buckets. The metal buckets are sold singularly and complete of tube.

A 32-15 N



Fixed angle rotor 37°
n. tubes for rotor 32
Max speed: 5.200 rpm
Max acceleration: 4.020 xg
Part number: 40100802

For tube of 15 ml

Metal bucket model	B 15F	B 15G	B 15P	RE 15-5/7
Tube type				Reducer for Vacutainer® tube 5/7 ml short 75 mm long 100 mm
Ø x H mm	16,5 x 120 type Falcon®	17 x 110 glass	17 x 102 plastic	13x75 - 13x100
Bottom	conical	round	round	round
Part number	40101002	40101012	40101022	40101292

A 8-50



Fixed angle rotor 37°
n. tubes for rotor 8
Max speed: 6.000 rpm
Max acceleration: 4.800 xg
Part number: 40100812

For tube of 50 ml

Metal bucket model	B 50XF	B 50XG	B 50XP	RE 50-15F	RE 50-15R	RE 50-10
Tube type				Reducer for tube of 15 ml type Falcon®	Reducer for tube of 15 ml round	Reducer for tube of 10 ml Vacutainer®
Ø x H mm	29 x 116	30 x 110	30 x 100	16,5 x 120	17 x 110	15,5 x 114
Bottom	conical	round	round	conical	round	round
Part number	40101032	40101042	40101052	40101322	40101332	40101342

A 6-100



Fixed angle rotor 37°
n. tubes for rotor 6
Max speed: 5.000 rpm
Max acceleration: 3.330 xg
Part number: 40100822

For tube of 100 ml

Metal bucket model	B 100G	B 100P	RE 100-50F	RE 100-50R	RE 100-15F	RE 100-15R
Tube type			Reducer for tube of 50 ml type Falcon®	Reducer for tube of 50 ml round	Reducer for tube of 15 ml type Falcon®	Reducer for tube of 15 ml round
Ø x H mm	45,5 x 104	45,5 x 104	29 x 116	30 x 110	16,5 x 120	17 x 110
Bottom	round	round	conical	round	conical	round
Part number	40101092	40101102	40101352	40101362	40101372	40101382

FIXED ANGLE ROTORS

For high speed










A 6-50



Fixed angle rotor HIGH SPEED 34°

n. tubes for rotor 6
Supplied with Biosafe lid
Max speed: 9.500 rpm
Max acceleration: 10.050 xg
Part number: 40100862

For tubes of 50 ml

Metal bucket model	B 50F	B 50G	B 50P	RE 50-15F	RE 50-15R	RE 50-10
						
Tube type	 type Falcon®	 glass	 plastic	Reductor for tube of 15 ml type Falcon®	Reductor for tube of 15 ml round	Reductor for tube of 10 ml Vacutainer®
Ø x H mm	29 x 116	30 x 110	30 x 100	16,5 x 120	17 x 110	15,5 x 114
Bottom	conical	round	round	conical	round	round
Part number	40101062	40101072	40101082	40101322	40101332	40101342



A 12-5

Fixed angle rotor 45°
For Eppendorf® tubes 5 ml
n. tubes for rotor 12
Supplied with Biosafe lid
Max speed: 14.000 rpm
Max acceleration: 20.380 xg
Part number: 40100832



A 24-2

Fixed angle rotor 45°
For Eppendorf® tubes 1,5/2,0 ml
n. tubes for rotor 24
Supplied with Biosafe lid
Max speed: 15.000 rpm
Max acceleration: 21.000 xg
Part number: 40100842



A 36-05

Fixed angle rotor 37°
For Eppendorf® tubes 0,5 ml
n. tubes for rotor 36
Supplied with Biosafe lid
Max speed: 15.000 rpm
Max acceleration: 21.000 xg
Part number: 40100852

RE 2-05

Reductor for microtubes of 0,5 ml for rotor A 24-2. Set of 24 pieces.
Part number: 40101262

RE 2-02

Reductor for microtubes of 0,2 ml for rotor A 24-2. Set of 24 pieces.
Part number: 40101272

RE 05-02

Reductor for microtubes of 0,2 ml for rotor A 36-05. Set of 36 pieces.
Part number: 40101282



PCR 4-8

Fixed angle rotor 45°
For PCR strips of 8 tubes
n. strips for rotor 4
Supplied with Biosafe lid
Max speed: 15.000 rpm
Max acceleration: 21.000 xg
Part number: 40100872

SELECTION GUIDE FOR CENTRIFUGE AND ROTOR

In the following pages useful guides for choice of centrifuge, rotor and accessories suitable for different applications are provided.

In the various table-guide, icons and symbols are used to simplify their reading.

For the right comprehension it is necessary verify the performance of individual accessories.

	 <p>S 4-175 4 x 175 ml max 4.500 rpm max 3.600 xg</p>	 <p>S 6-96 MP 6 x 96 deep wells max 3.200 rpm max 1.950 xg</p>	 <p>A 32-15 N 32 x 15 ml max 5.200 rpm max 4.020 xg</p>	 <p>A 8-50 8 x 50 ml max 6.000 rpm max 4.800 xg</p>	 <p>A 6-100 6 x 100 ml max 5.000 rpm max 3.330 xg</p>
NEYA 8  max 6.000 rpm	✓	✓	✓	✓	✓
NEYA 10  max 6.000 rpm	✓ PROG	✓ PROG	✓ PROG	✓ PROG	✓ PROG
NEYA 10R  max 6.000 rpm	✓ PROG 	✓ PROG 	✓ PROG 	✓ PROG 	✓ PROG 
NEYA 16  max 16.000 rpm	✓ PROG	✓ PROG	✓ PROG	✓ PROG	✓ PROG
NEYA 16R  max 16.000 rpm	✓ PROG 	✓ PROG 	✓ PROG 	✓ PROG 	✓ PROG 



max 6.000 rpm

Centrifuge
with maximum speed 6.000 rpm



max 16.000 rpm

Centrifuge High Speed
with maximum speed 16.000 rpm



Centrifuge Professional
with 10 programs



Centrifuge Refrigerated
-10 ÷ +40 °C / +14 ÷ +104 °F

A 6-50



6 x 50 ml
max 9.500 rpm
max 10.050 xg

A 12-5



12 x 5 ml
max 14.000 rpm
max 20.380 xg

A 24-2



24 x 2 ml
max 15.000 rpm
max 21.000 xg

A 36-05






















36 x 0,5 ml
max 15.000 rpm
max 21.000 xg

PCR 4-8



4 strip of 8 PCR
max 15.000 rpm
max 21.000 xg

SELECTION GUIDE FOR ACCESSORIES

		 S 4-175 4 x 175 ml max 4.500 rpm max 3.600 xg		 S 6-96 MP 6 x 96 deep wells max 3.200 rpm max 1.950 xg	 A 32-15 N 32 x 15 ml max 5.200 rpm max 4.020 xg	 A 8-50 8 x 50 ml max 6.000 rpm max 4.800 xg	 A 6-100 6 x 100 ml max 5.000 rpm max 3.330 xg
		buckets B 175	other carriers				
Microtubes 0,2 ml		-	-	-	-	-	-
Microtubes 0,5 ml		-	-	-	-	-	-
Microtubes 1,5-2 ml		48 with inserts I 12-2	-	-	-	-	-
Microtubes 5 ml		-	-	-	-	-	-
Collection tubes 5/7 ml		28 with inserts I 7-5/7	64 with carriers B 16-5/7	-	32 with reductors RE 15-5/7 RE 15-5/7	-	-
Collection tubes 10 ml		28 with inserts I 7-10	48 with carriers B 12-10	-	32 with metal buckets B 15P	8 with reductors RE 50-10	-
Round bottom 15 ml		16 with inserts I 4-15R	28 with carriers B 7-15R	-	32 with metal buckets B 15P o B 15G	8 with reductors RE 50-15R	6 with reductors RE 100-15R
Conical bottom 15 ml		16 with inserts I 4-15F	28 with carriers B 7-15F	-	32 with metal buckets B 15F	8 with reductors RE 50-15F	6 with reductors RE 100-15F
Round bottom 50 ml		4 with inserts I 1-50R	8 with carriers B 2-50R	-	-	8 with metal buckets B 50XP o B 50XG	6 with reductors RE 100-50R
Conical bottom 50 ml		4 with inserts I 1-50SF	8 with carriers B 2-50F	-	-	8 with metal buckets B 50XF	6 with reductors RE 100-50F
Round bottom 100 ml		4 with inserts I 1-100	-	-	-	-	6 with metal buckets B 100P o B 100G
Flat bottom bottle 175 ml		4 direct insertion	-	-	-	-	-
Microplates		-	-	6 microplates of 96 deep wells	-	-	-
PCR strips		-	-	-	-	-	-

A 6-50

6 x 50 ml
max 9.500 rpm
max 10.050 xg

A 12-5

12 x 5 ml
max 14.000 rpm
max 20.380 xg

A 24-2

24 x 2 ml
max 15.000 rpm
max 21.000 xg

A 36-05

36 x 0,5 ml
max 15.000 rpm
max 21.000 xg

PCR 4-8

4 strips of 8 PCR
max 15.000 rpm
max 21.000 xg

-	-	24 with reductors RE 2-02	36 with reductors RE 05-02	-
-	-	24 with reductors RE 2-05	36 direct insertion	-
-	-	24 direct insertion	-	-
-	12 direct insertion	-	-	-
-	-	-	-	-
6 with reductors RE 50-10	-	-	-	-
6 with reductors RE 50-15R	-	-	-	-
6 with reductors RE 50-15F	-	-	-	-
6 with metal buckets B 50XP o B 50XG	-	-	-	-
6 with metal buckets B 50XF	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	4 strips of 8 PCR direct insertion

SELECTION GUIDE FOR ACCESSORY


Only for swing out rotor S 4-175



KIT SB 4-175



Swing rotor S 4-175

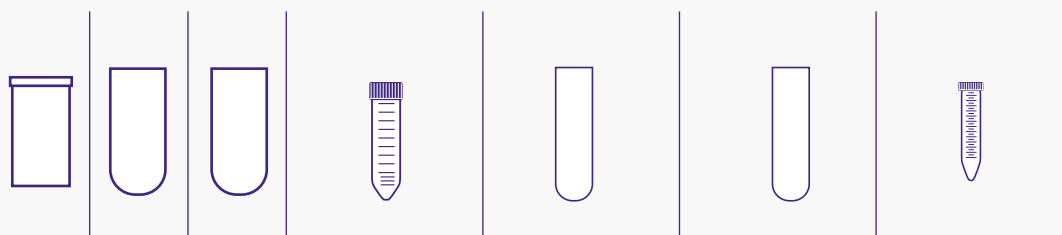

Type / Brand	Bottle/ REMI	Round / REMI	Round / REMI	Conical / Falcon®	Round / REMI	Round / REMI	Conical / Falcon®
Max volume (ml)	175	100	100	50	50	50	15
Material	Plastic	Glass	Plastic	Plastic	Glass	Plastic	Plastic
Tube diameter (mm)	56,5	45,5	45,5	29	30	30	16,5
Total height (mm)	97	102	100	116	110	100	120

Bucket/carrier	B 175	B 175	B 175	B 175	B 2-50F	B 175	B 2-50R	B 175	B 2-50R	B 175	B 7-15F
Insert		I1-100	I1-100	I1-50SF		I1-50R		I1-50R		I4-15F	
N° tubes insert/carrier	1	1	1	1	2	1	2	1	2	4	7
N° tubes for rotors	4	4	4	4	8	4	8	4	8	16	28
Hole diameter (mm)	57	46	46	29,5	29,5	30,5	30,5	30,5	30,5	17	17
Hole depth (mm)	92	65	65	76	85	74	85	74	85	76	45
Insert/carrier height (mm)	99	77	77	80	90	80	90	80	90	79	88

Inserts for bucket B 175

Buckets or carriers for rotor S 4-175

Aluminum carriers for swing out rotor S 4-175



*

	B 2-50F	B 2-50R	B 7-15F	B 7-15R	B 12-10	B 14-5/7	B 16-5/7
<i>For tube</i>	50 ml conical	50 ml round	15 ml conical	15 ml round	10 ml	5/7 ml	5/7 ml
<i>Max tubes for carrier</i>	2	2	7	7	12	14	16
<i>Max tubes for rotor</i>	8	8	28	28	48	56	64
<i>Maximum speed</i>	4500 rpm	4500 rpm	4500 rpm	4500 rpm	4500 rpm	4500 rpm	4500 rpm
<i>Maximum acceleration</i>	3600 xg	3600 xg	3600 xg	3600 xg	3600 xg	3600 xg	3600 xg
<i>Part number</i>	40101532	40101582	40101542	40101592	40101552	40101562	40101572

* Inside carrier B 16-5/7 it is not possible to put tubes with height (without cap) less than 60 mm. Refer to below table in the section "hole depth".

Round / REMI	Round / REMI	Collection tube / Becton Dickinson-Terumo - Sarstedt	Collection tube / Becton Dickinson-Terumo - Sarstedt	Collection tube / Becton Dickinson-Terumo - Sarstedt	Microtube/ Eppendorf®
15	15	10	5-7	5-7	2
Glass	Plastic	Plastic	Plastic	Plastic	Plastic
17	17	15,5	12,5	12,5	10,6
110	102	114	116	81	42

B 175	B 7-15R	B 175	B 7-15R	B 175	B 12-10	B 175	B 14-5/7	B 175	B 16-5/7	B 175
I 4-15R		I 4-15R		I 7-10		I 7-5/7		I 7-5/7		I 12-2
4	7	4	7	7	12	7	14	7	16	12
16	28	16	28	28	48	28	56	28	64	48
17,5	17,5	17,5	17,5	16	16	13	13	13	13	11
76	45	76	45	75	44	56	38	56	60	34
80	88	80	88	70	88	59	88	59	63	39

CENTRIFUGING

Centrifuges are instruments used in many laboratories to separate particles in liquid solutions or liquids with different density, applying them an artificial centrifugal force.

Use of centrifuges permits developing of a much higher force than gravity earth force, thus accelerating separation and sedimentation process.

Swing out rotors (with variable angle)



During centrifugation the tubes go in perpendicular position than axis of rotor. As a consequence the sedimentation distance and time are greater, but separation borders are perpendicular to the tube and more net.

The swing out rotors are generally used to centrifuge big quantity of sample with medium speed.



Angular rotors (with fixed angle)

The oblique angle of tubes reduces sedimentation distance, thus reducing the necessary time for separation, but borders are inclined respect the tube and less net. The fixed angle rotors are generally used to centrifuge minor quantity of sample with high speed.

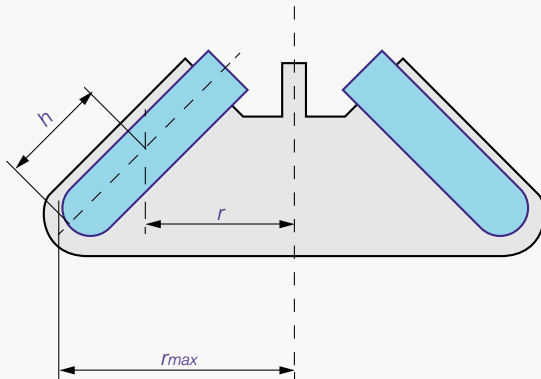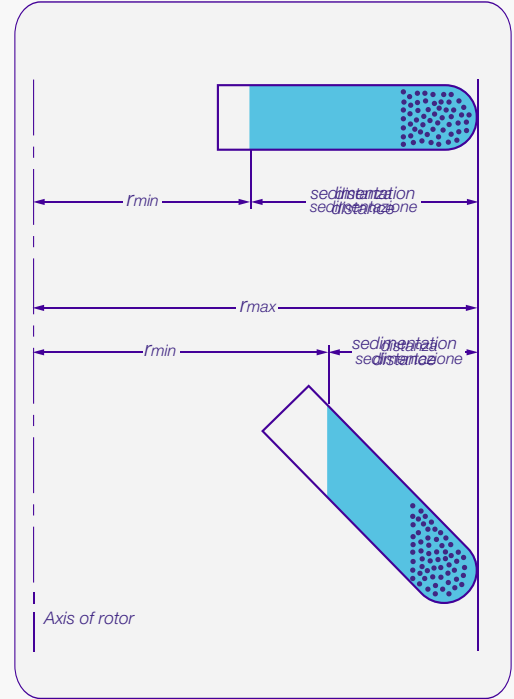

The simplified formula to calculate RCF is:

$$RCF = (n/1000)^2 \times r \times 11,18$$

n = speed (rpm) and **r** = radius in cm

Calculation of centrifugal force

Generally the performance of centrifuge are specified in function of the maximum achievable speed. However the speed represents only approximately the real force developed into the sample that generates the separation.

This force is expressed like relative centrifugation force (RCF). Its value indicates how many times the centrifugation force exceeds the natural gravity acceleration "g".

Observing the lateral formula it is clear that RCF is directly proportional to the axis of rotor and linked to the square of speed. It means that, for example doubling radius, RCF doubles and it quadruples with doubling of speed.

As a consequence the performance of centrifuges should be compared only on RCF values.



www.giorgiobormac.com

GUARANTEED BY:

GIORGIO BORMAC
s.r.l.

ISO certified
manufacturer



EU Designed
Made in India

DISTRIBUTED BY:

